


# William N. Lamarre Concrete Products, Inc.

## H2O 2-COMPARTMENT COMMERCIAL GRADE PRECAST SEPTIC/HOLDING TANKS- 2-COMP.

### 3500-10,000 GAL. CAPACITY


(5000 gal tank shown)

(Drawings Not to Scale)

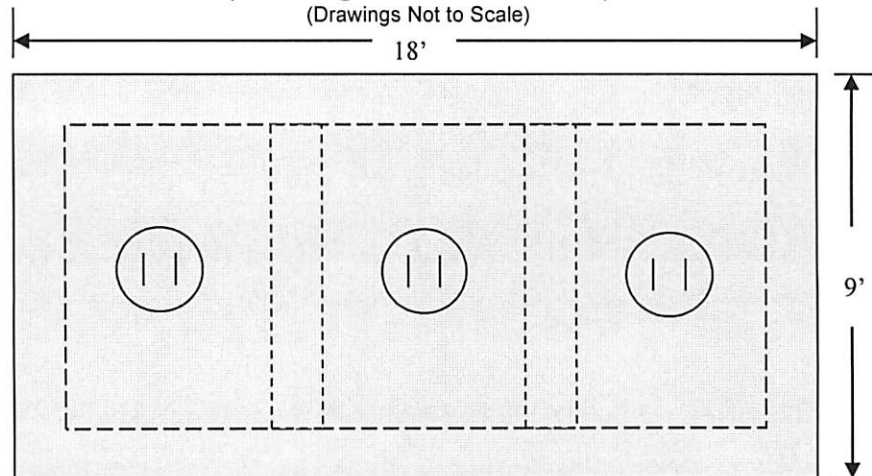

TOP VIEW-TOP

3 CLEANOUTS - 26" DIAMETER or  
to Contractor Specifications

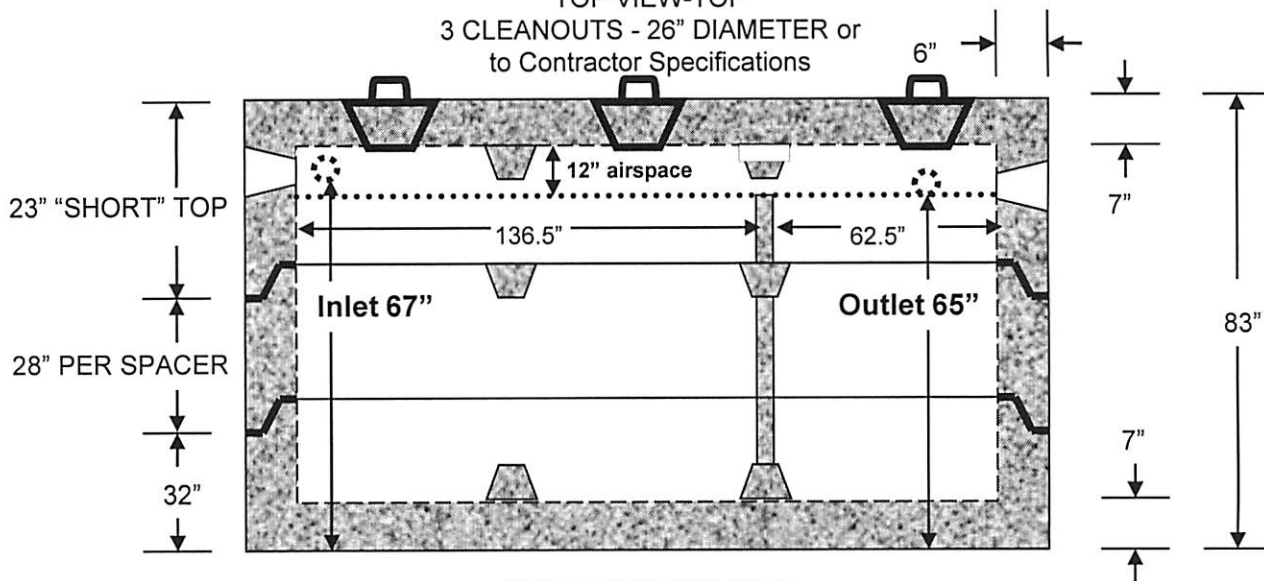

CROSS SECTION VIEW  
TAPERED CROSSMEMBERS

### Notes

1. Concrete strength  $f_c$  5000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Reinforcement per ASTM C1227-latest revision
5. Design Loading AASHTO HS20-40
6. Construction joints sealed with butyl rubber
7. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks (except 3500)

P.O. Box #333, 87 Adams Hill Rd, Greenville, NH 03048  
603-878-1340 MA 800-937-3435 NH 800-878-0514 Fax: 603 878-3349