








# William N. Lamarre Concrete Products, Inc.

## PRECAST STEPS

4', 5', 6' and 8' Widths  
Standard and Side-Entry

(Drawings Not to Scale)

Dimensions						
<b>Height:</b>	<b>7"</b>	<b>14"</b>	<b>21"</b>	<b>28"</b>	<b>35"</b>	<b>42"</b>
<b>Length:</b>						
- Standard:	<b>42"</b>	<b>54"</b>	<b>66"</b>	<b>78"</b>	<b>90"</b>	<b>102"</b>
(Closed Back)						
-Side-Entry:	<b>60"</b>	<b>72"</b>	<b>84"</b>	<b>96"</b>	<b>108"</b>	<b>120"</b>
<b>-Riser</b>	<b>1 Riser</b>	<b>2 Riser</b>	<b>3 Riser</b>	<b>4 Riser</b>	<b>5 Riser</b>	<b>6 Riser</b>
						

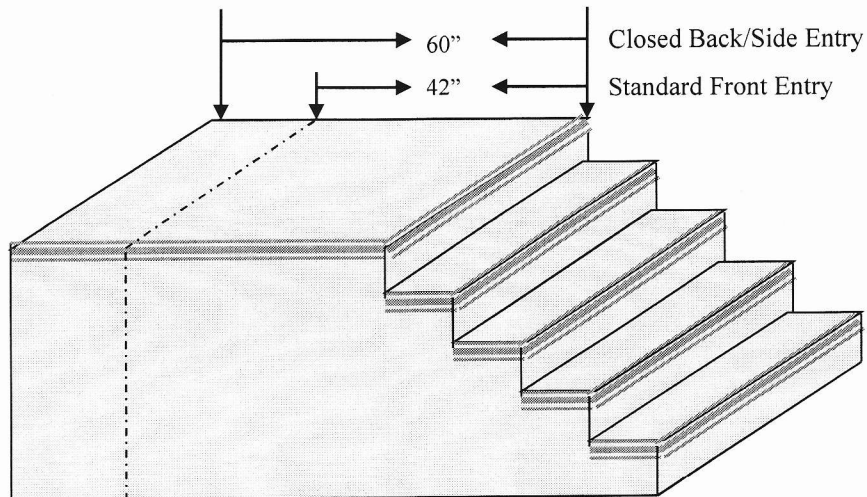

### Notes

1. Side-Entry Steps only available in 4' wide.
2. Short or no platform steps also available via special order.
3. Railings for all sizes except special orders in stock.
4. Concrete strength f'c 4000PSI@28 days. Density 150 PCF. Cement, Portland Type II or III, ASTM C150-81
5. Fiber, Admixtures, air & plasticizers per ASTM C233-82