


William N. Lamarre Concrete Products, Inc.

BULKHEADS

Drawing Not to Scale

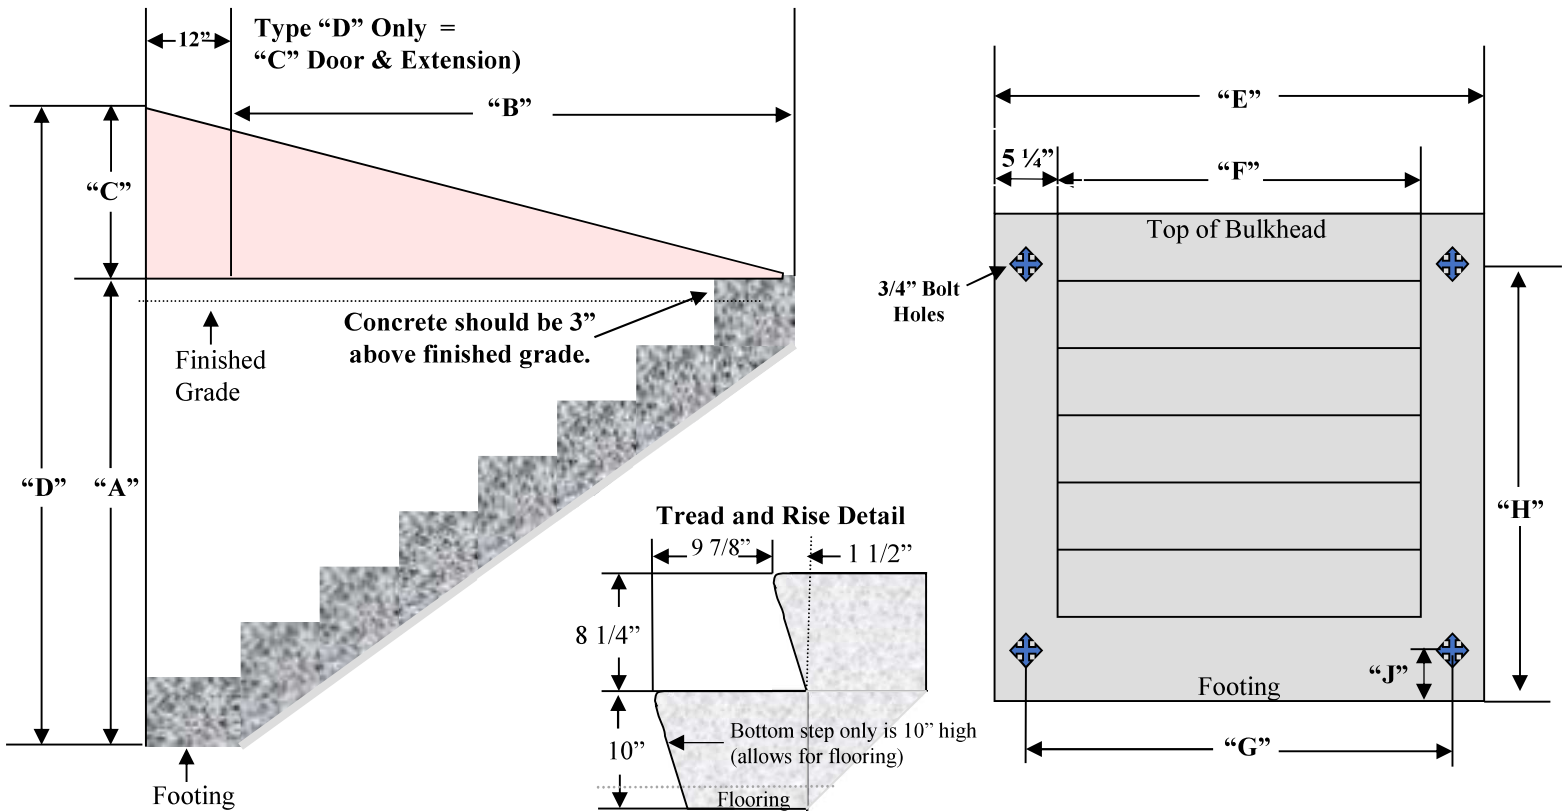

Type	A Bulkhead Height	B Door Length	C Door Height	D Total Height	E Bulkhead Width	F Width of Stair Area	Max Opening in Foundation	G Center of Bolts	H Footing to Top Bolt	J Footing to Bottom Bolt
S	43"	45"	52"	95"	51 1/2"	42"	37"	47 1/2"	38"	13"
O	60"	60"	30"	90"	51 1/2"	42 1/4"	37"	47 1/2"	50 1/2"	13"
B	68"	66"	22"	90"	55 1/2"	46 1/2"	42"	51 1/2"	59"	13"
C	76"	74"	19 1/2"	95 1/2"	55 1/2"	47"	42"	51 1/2"	66 3/4"	13"
D	84"	86"	22"	106"	55 1/2"	47"	42"	51 1/2"	66 3/4"	13"

*****All Sitework by Others*****

Prices are Standard for New Construction.

Additional Charge for Replacements; Includes installation only.

**If site not ready: \$250 return fee. Price includes 2 hours of labor on site. \$250/hr. if additional site work needed.

Notes

1. Concrete strength f'c 4000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82