


William N. Lamarre Concrete Products, Inc.


H2O COMMERCIAL GRADE H2O PRECAST SEPTIC/HOLDING TANKS

3500 to 11,000 Gallon

(Drawings Not to Scale)

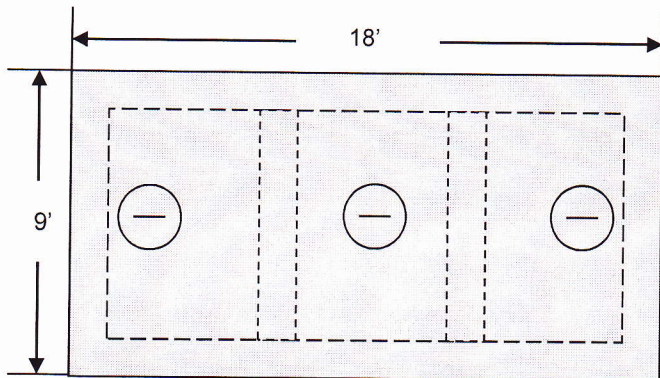

TOP VIEW-TOP
3 CLEANOUTS - 26" DIAMETER

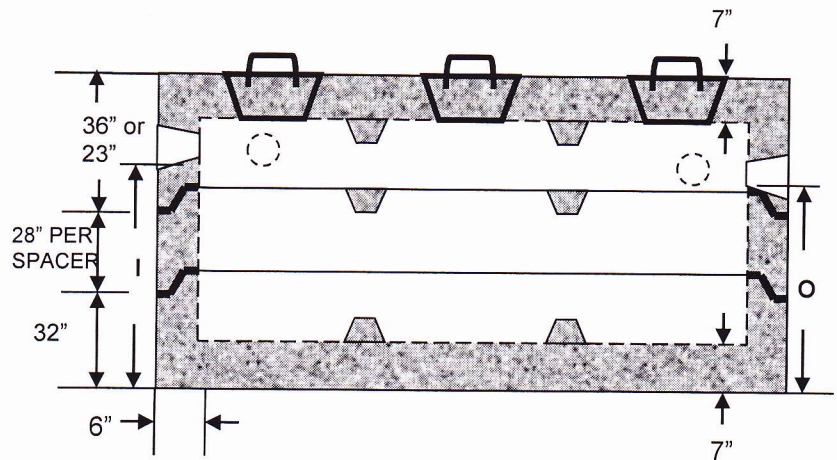

CROSS SECTION VIEW WITH ONE SPACER
TAPERED CROSSMEMBERS

Critical Tank Dimensions				
Gallons	Inlet / Outlet	Height	Septic Capacity	Holding Capacity
3500	51" / 49"	68"	3655	4675
5000	67" / 65"	83"	5015	6035
5500	79" / 77"	96"	5865	7140
7000	95" / 93"	111"	7395	8415
8000	107" / 105"	124"	8415	9435
9000	123" / 121"	139"	9775	10,795
10,000	135" / 132"	152"	10,969	11,815
11,000	151" / 149"	167"	12,155	13,175

Notes

1. Concrete strength f'c 5000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Reinforcement per ASTM C1227-latest revision
5. Design Loading AASHTO HS20-40
6. Construction joints sealed with butyl rubber
7. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks (except 3500)
8. Optional: Spray coated w/Ebony Damp Proofer Waterproofer