


# William N. Lamarre Concrete Products, Inc.


## H2O COMMERCIAL GRADE PRECAST TANK

### 3000 TO 8000 GAL CAPACITY

(Drawings Not to Scale)

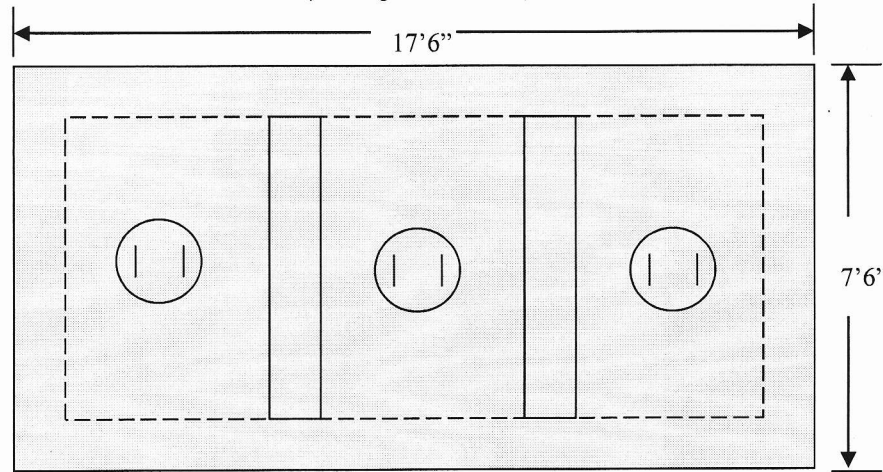

TOP VIEW-TOP  
3 CLEANOUTS - 26" DIAMETER

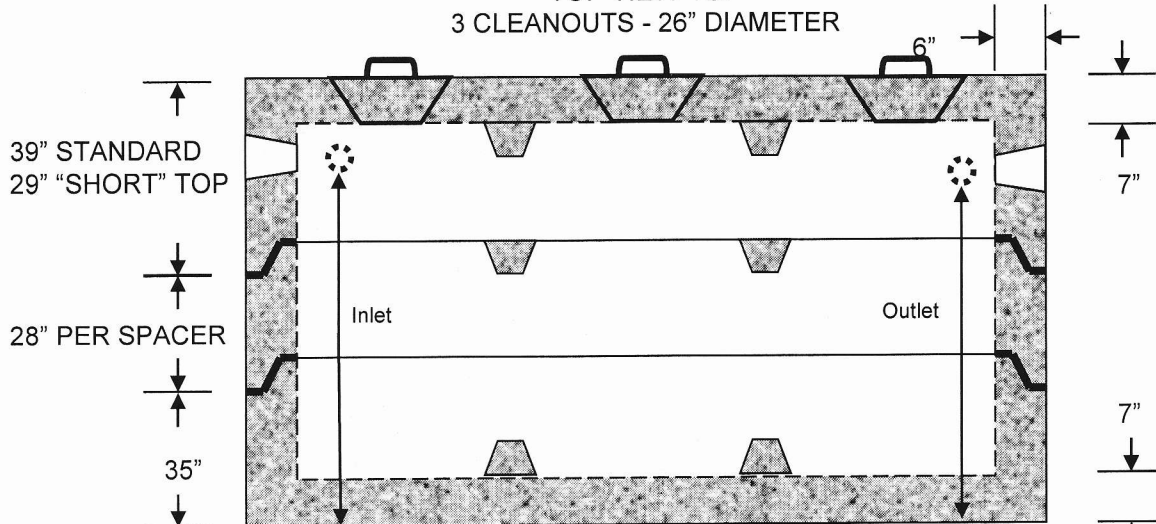

CROSS SECTION VIEW WITH ONE SPACER  
TAPERED CROSSMEMBERS

Critical Tank Dimensions				
Gallons	Inlet / Outlet	Height	Septic Capacity	Holding Capacity
3000	57" / 55"	74"	3240	4185
4000	75" / 73"	92"	4455	5265
5000	85" / 82"	102"	5130	5940
6000	103" / 101"	120"	6345	7155
7000	113" / 111"	130"	7020	7830
8000	131" / 129"	148"	8235	9045

**Notes**

1. Concrete strength f<sub>c</sub> 5000PSI@28 days. Density 150 PCF.
  2. Cement, Portland Type II or III, ASTM C150-81
  3. Admixtures, air & plasticizers per ASTM C233-82
  4. Reinforcement per ASTM C1227-latest revision
  5. Design Loading AASHTO HS20-40
  6. Construction joints sealed with butyl rubber
  7. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks
- P.O. Box #333, 87 Adams Hill Rd, Greenville, NH 03048  
603-878-1340 MA 800-937-3435 NH 800-878-0514 Fax: 603 878-3349