


William N. Lamarre Concrete Products, Inc.


HD (Top Loading) PRECAST SEPTIC TANKS

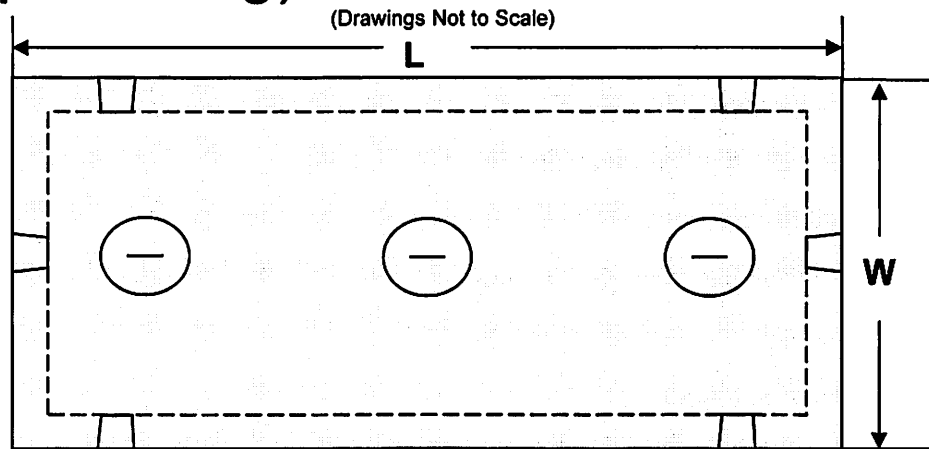

TOP VIEW-TOP

3 CLEANOUTS - 26" DIAMETER min.

Wall taper
4" to 3" at the joint

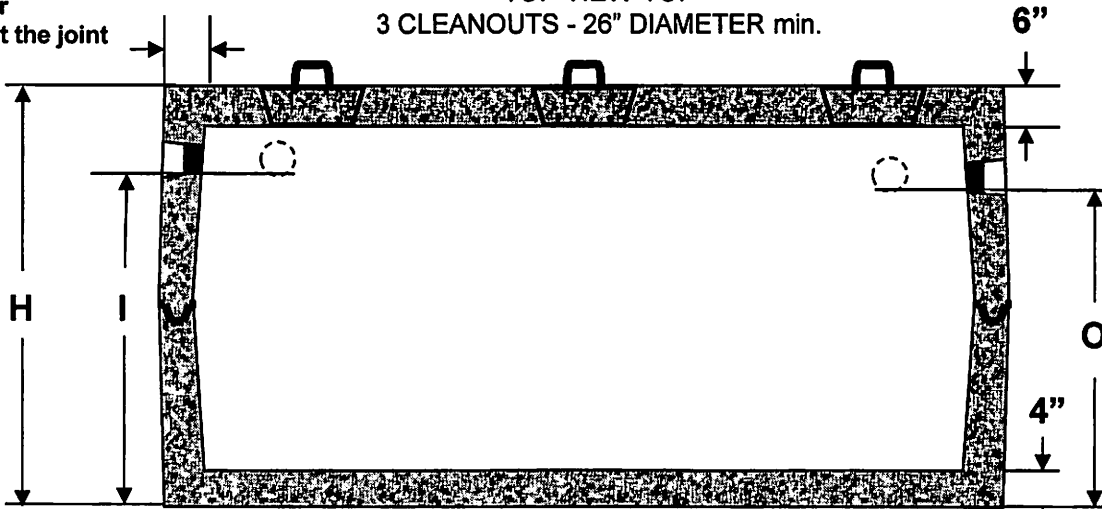

CROSS SECTION SIDE VIEW

Critical Tank Dimensions				
Liquid Capacity	I / O	H	L x W	Excavation Size
1000	56" / 53"	70"	8'6" x 4'10"	11' x 6'
1250	55" / 52"	70"	10' x 5'	12' x 7'
1500	56" / 53"	70"	10'6" x 5'6"	12' x 7'
2000	56" / 53"	69 1/2"	12' x 6'6"	13' x 8'
2500	71" / 68"	84 1/2"	12' x 6'6"	13 x 8'
3000	86" / 83"	99 1/2"	12' x 6'6"	13' x 8'

Notes

1. Concrete strength f_c 4000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Reinforcement per ASTM C1227-latest revision
5. Heavy-duty top loading
6. Construction joints sealed with butyl rubber
7. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks

P.O. Box #333, 87 Adams Hill Rd, Greenville, NH 03048

603-878-1340 MA 800-937-3435 NH 800-878-0514 Fax: 603 878-3349