



# William N. Lamarre Concrete Products, Inc.

## MONOLITHIC TANKS

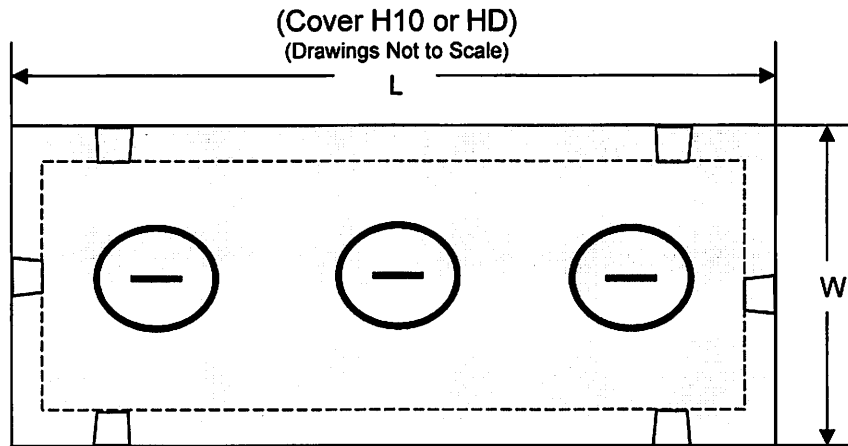

TOP VIEW-TOP  
3 CLEANOUTS - 26" DIAMETER

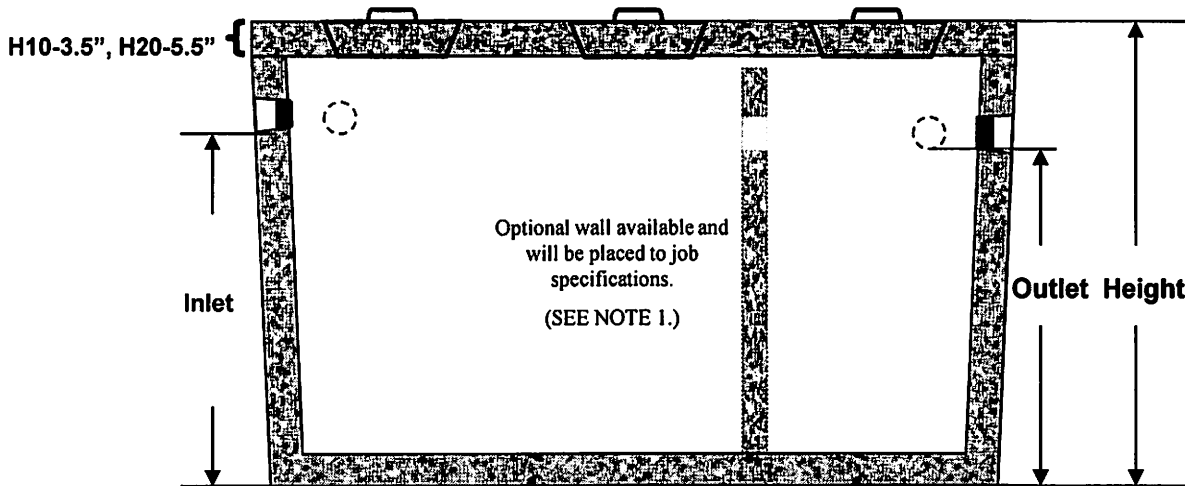

SIDE VIEW

Critical Tank Dimensions

Liquid Capacity	Inlet/Outlet	Height Add 2" for HD	L x W	Excavation Size
1000	55" / 52"	68"	8' 7" x 4' 11"	11' x 7'
1500	54½" / 51½"	68"	10' 3" x 6' 2½"	12' x 8'
1000/500*	54½" / 51½"	68"	10' 3" x 6' 2½"	12' x 8'
2000	55" / 52"	68½"	12' 9½" x 6' 9½"	14' x 11'
2000* 1/3-2/3	55" / 52"	68½"	12' 9½" x 6' 9½"	14' x 11'

### Notes

1. Special purpose Mono Tanks also available including FAST tanks & 2-Compartment tanks (wall placement & cleanout to be determined by job specs.)(\*Cleanout cover placement varies.)
2. Concrete strength f'c 4000PSI@28 days. Density 150 PCF.
3. Cement, Portland Type II or III, ASTM C150-81
4. Admixtures, air & plasticizers per ASTM C233-82
5. Reinforcement per ASTM C1227-latest revision
6. Heavy duty top loading available – add 2" to height
7. Construction joints sealed with butyl rubber
8. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks