


# William N. Lamarre Concrete Products, Inc. PRECAST UTILITY BUILDING

Drawing Not to Scale

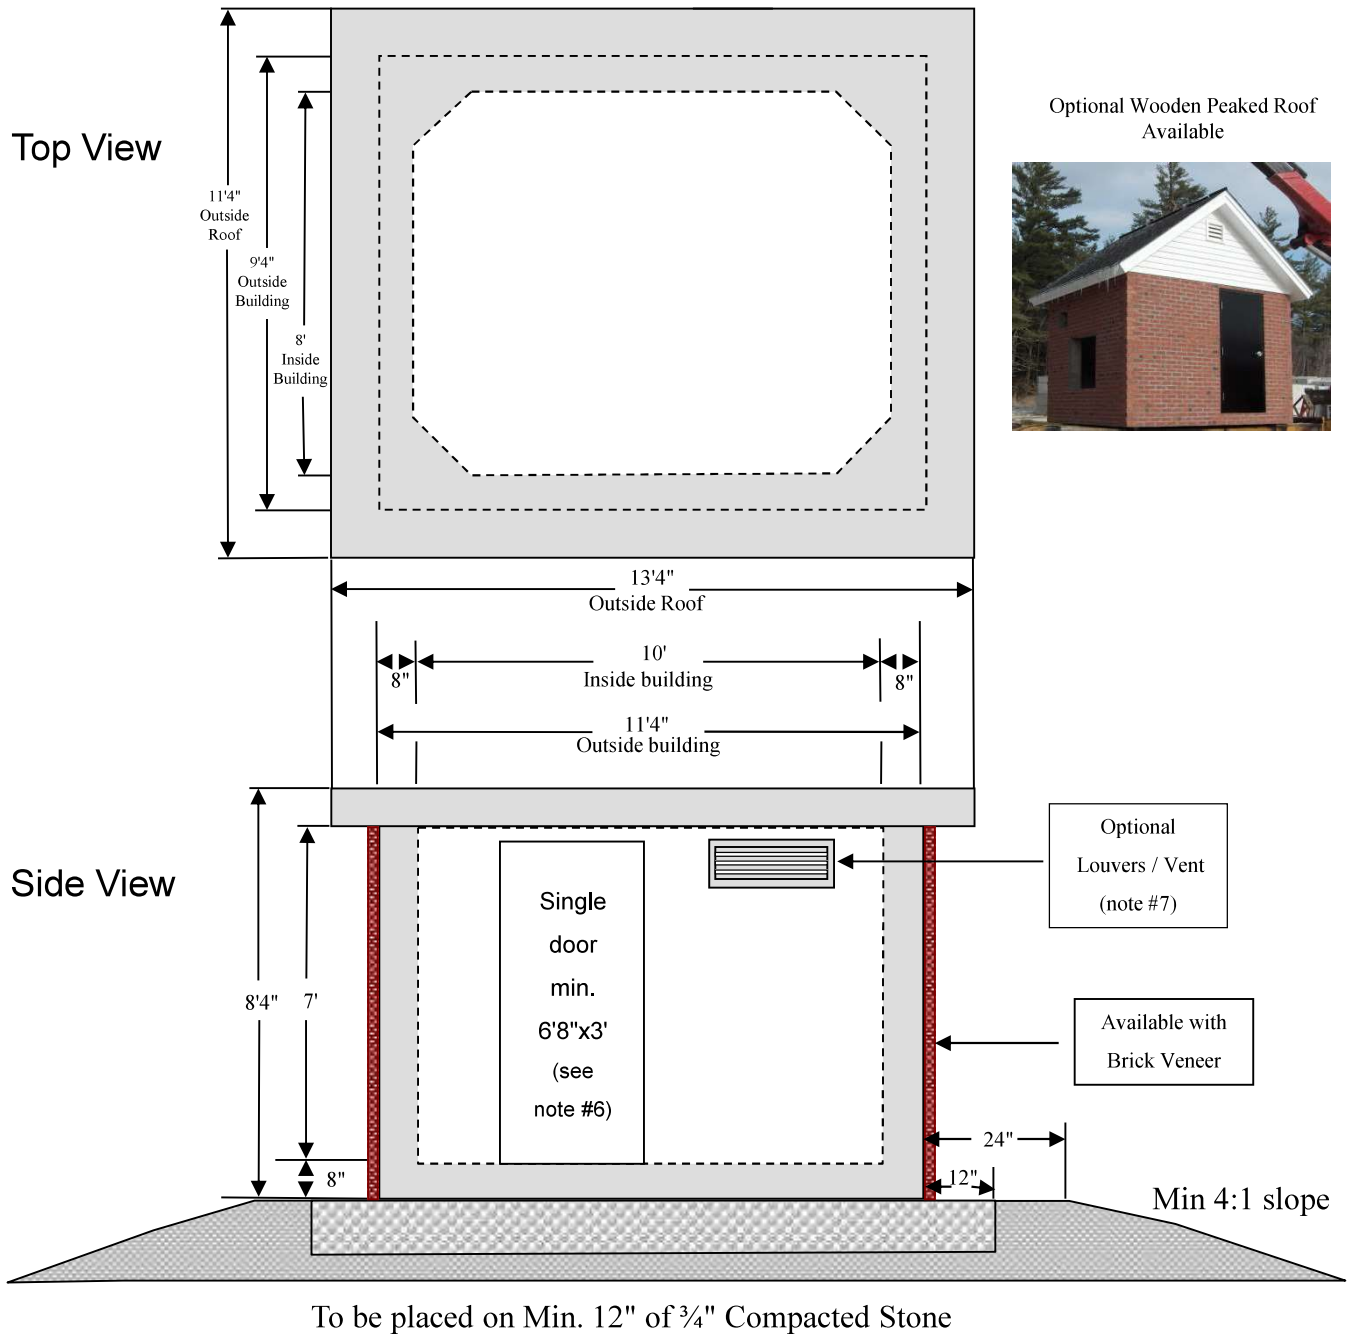

1. Concrete strength f'c 5000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Construction joints sealed with butyl rubber
5. Construction joints sealed with butyl rubber
6. Door location per customers spec. Option on double door available.
7. Venting: Louvers / vents – optional per customers specs.
8. Building weight 52,976#