


William N. Lamarre Concrete Products, Inc.


HD TOP LOADING 2000 SOS

(Drawings Not to Scale)


Item is made to order – this is an example. Holes & pipe may vary.

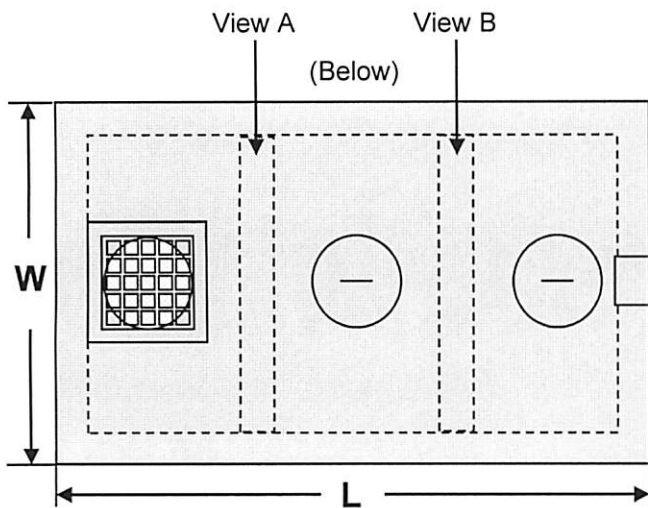


TOP VIEW-TOP
3 CLEANOUTS - 26" DIAMETER

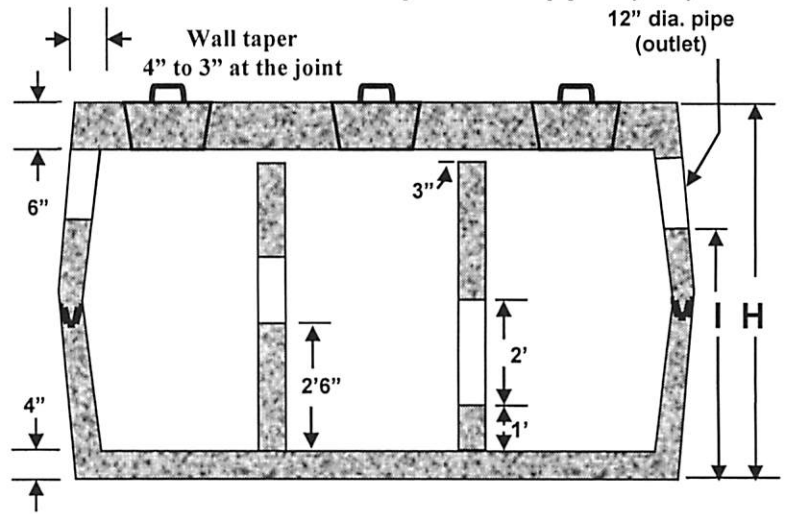

SIDE VIEW
CROSS SECTION



View A



View B

Critical Tank Dimensions				
Liquid Capacity	Inlet/Outlet I / O	Height(H)	Length x Width L x W	Excavation Size
2000	52" / 50"	69.5"	12'X6'6"	13"X8'

Notes

1. Concrete strength f'c 4000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Reinforcement per ASTM C1227-latest revision
5. Constructions joints sealed with butyl rubber
6. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks