


William N. Lamarre Concrete Products, Inc.


JUMBO DRYWELL

Available H10 and HD(Top Loading)

(Drawings Not to Scale)

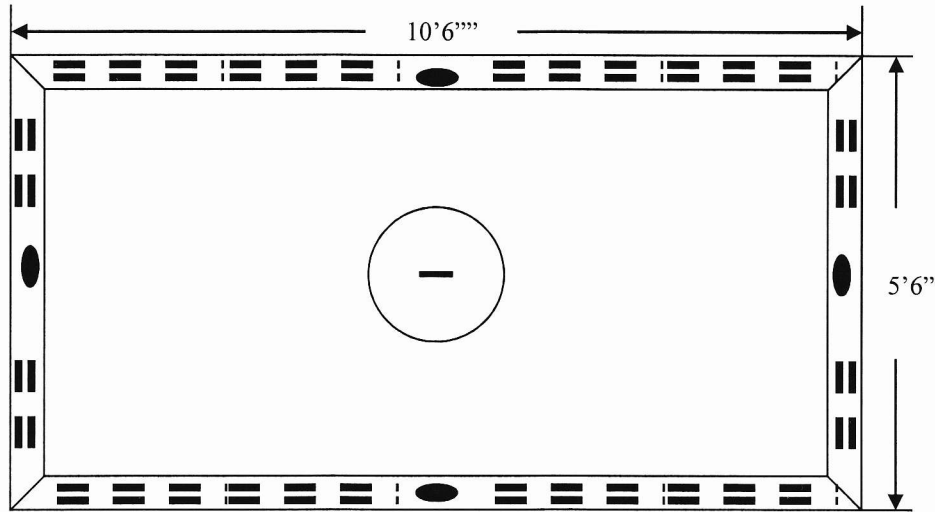

TOP VIEW-TOP
1 CLEANOUT - 24" DIAMETER

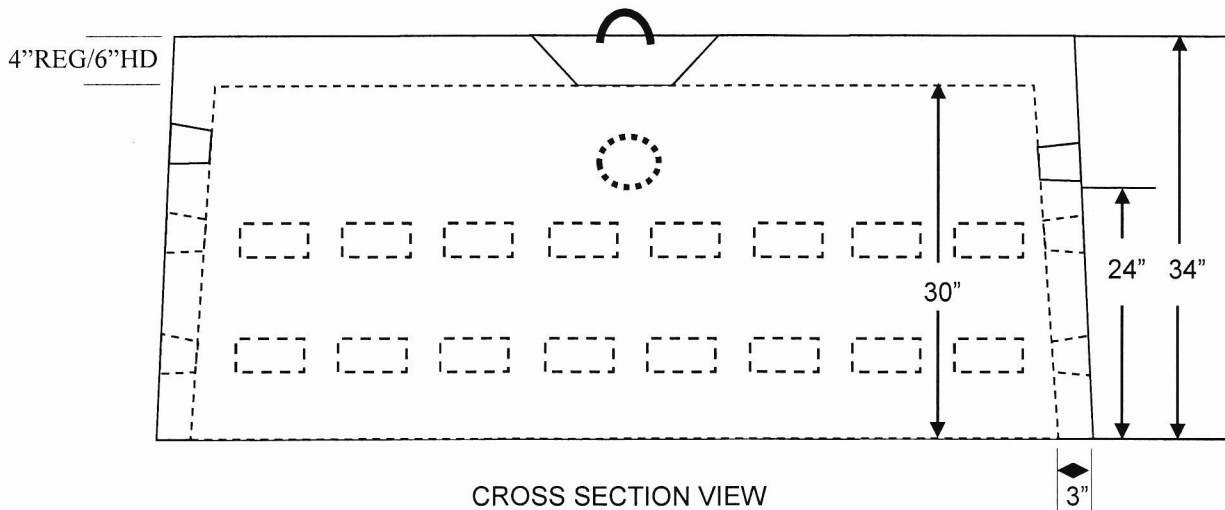

CROSS SECTION VIEW

Notes

1. Concrete strength f'_c 4000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Heavy-duty is 2" higher due to increased top thickness - 6" TOP.