



William N. Lamarre Concrete Products, Inc.

LEDGE TANKS H10 or HD (Top Loading)

(H10 Shown)
(Drawings Not to Scale)

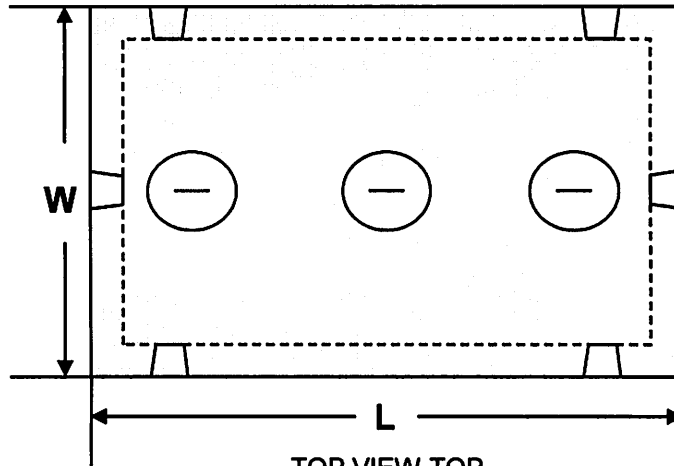

TOP VIEW-TOP
3 CLEANOUTS - 26" DIAMETER min.

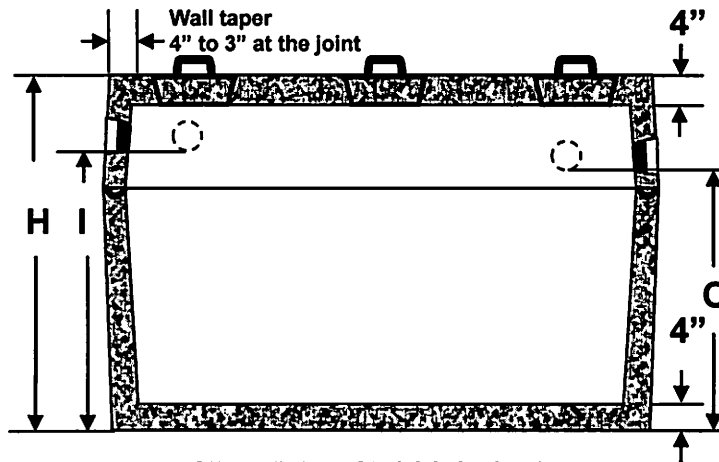

SIDE VIEW - CROSS SECTION

Critical Tank Dimensions					
Liquid Capacity	Inlet/Outlet I / O	Height(H)		Length x Width L x W	Excavation Size
		H10	HD		
1000	37" / 35"	50"	52"	10'6" x 5'6"	12' x 7'
1250	44" / 41"	56 1/2"	58 1/2"	10'6" x 5'6"	12' x 7'
1500	40" / 37"	55"	57"	12' x 6'6"	13' x 8'

Notes

1. Concrete strength $f'c$ 4000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Reinforcement per ASTM C1227-latest revision
5. Heavy-duty top loading available – add 2" to height
6. Constructions joints sealed with butyl rubber