


William N. Lamarre Concrete Products, Inc.

H2O MONOLITHIC TANKS –COMMERCIAL

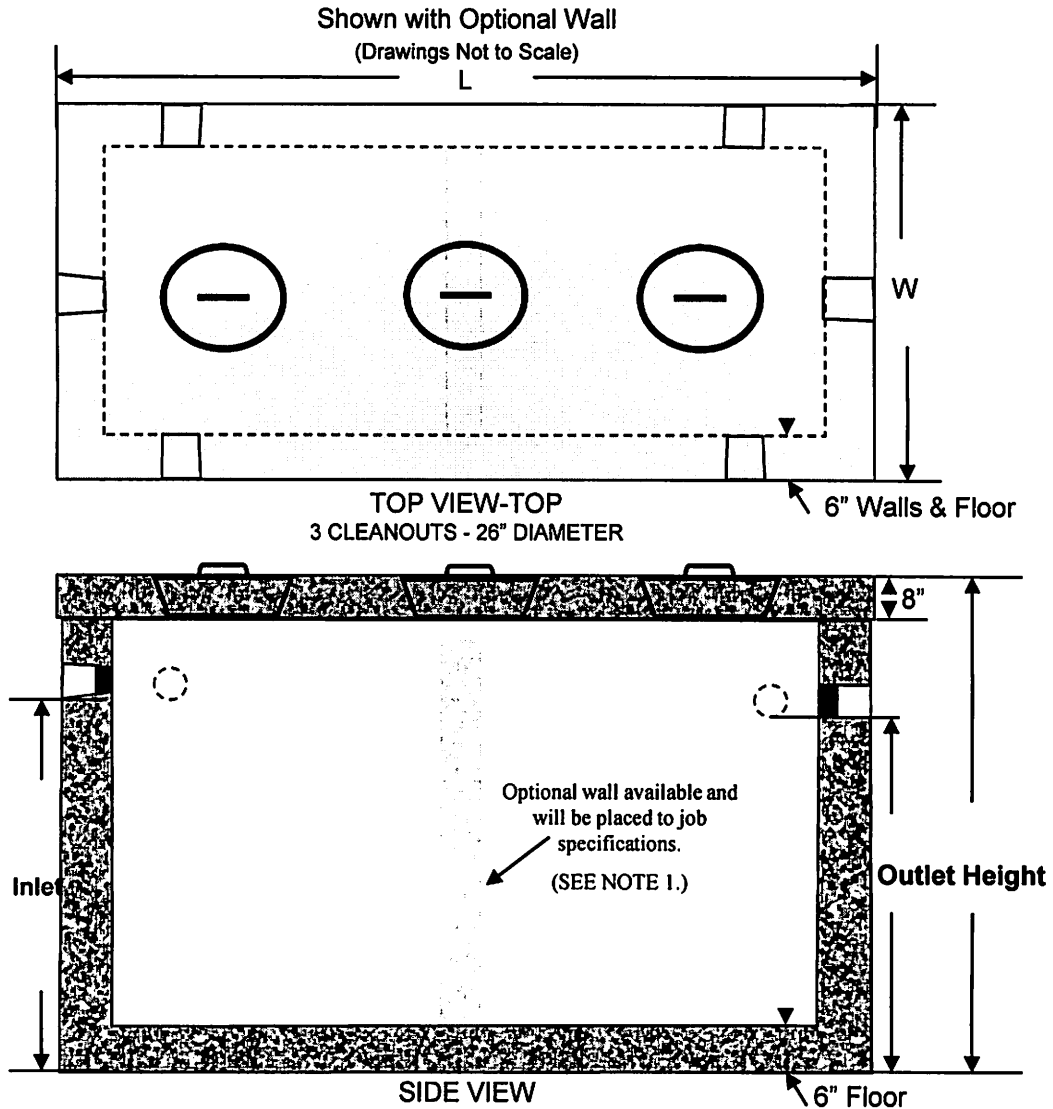

Critical Tank Dimensions				
Liquid Capacity	Inlet/Outlet	Height	L x W	Excavation Size
1000	58" / 56"	76"	9'4" x 5'4"	11'4" x 7'4"
1500	58" / 56"	76"	11' x 6'	13' x 8'
2000	68" / 66"	86"	11' x 7'	13' x 9'

Notes

1. Special purpose Mono Tanks also available including FAST tanks & 2-Compartment tanks-wall placement & cleanout to be determined by job specs.)
2. Concrete strength f_c 5000PSI@28 days. Density 150 PCF.
3. Cement, Portland Type II or III, ASTM C150-81
4. Admixtures, air & plasticizers per ASTM C233-82
5. Reinforcement per ASTM C1227-latest revision
6. Design Loading AASHTO HS20-40
7. Construction joints sealed with butyl rubber
8. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks

P.O. Box #333, 87 Adams Hill Rd, Greenville, NH 03048

603-878-1340 MA 800-937-3435 NH 800-878-0514 Fax: 603 878-3349