


William N. Lamarre Concrete Products, Inc.

4' DIAMETER MANHOLES

4' inside diameter, 8" walls

H20

(Drawings Not to Scale)

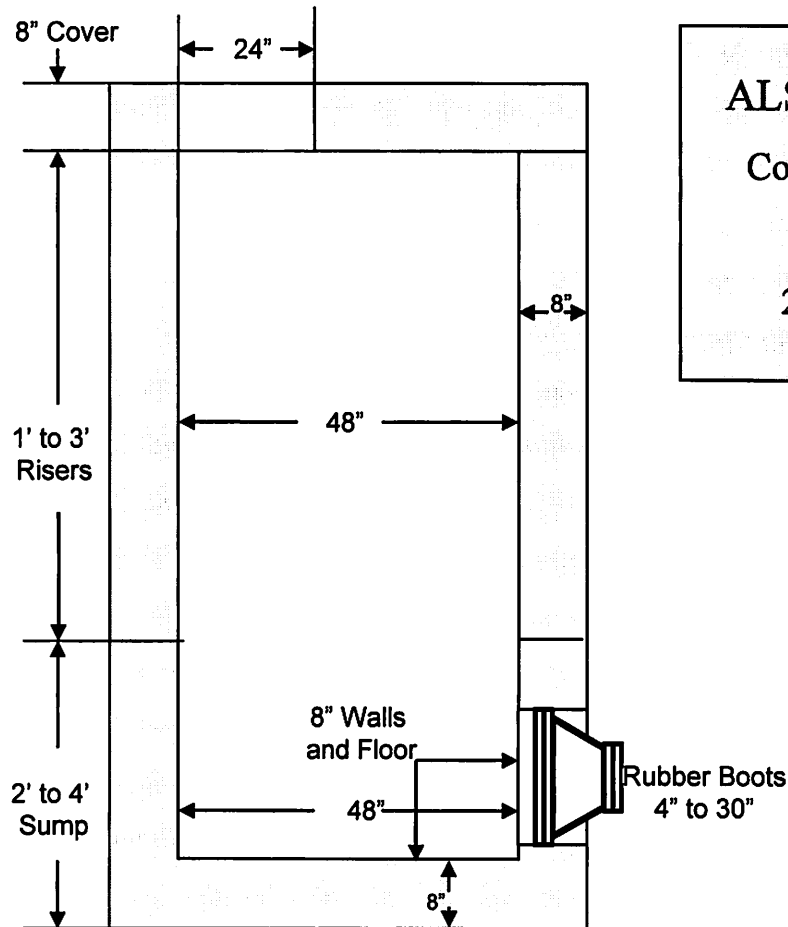

ALSO Available:
Concentric Cone
18" high
24" opening

Section View - Typical Installation

Notes

1. Holes cored to your plans/specifications. Drawings or plans must be submitted prior to any coring.
2. Concrete strength f_c 4000PSI@28 days. Density 150 PCF. 5000PSI available.
3. Cement, Portland Type II or III, ASTM C150-81
4. Fiber, Admixtures, air & plasticizers per ASTM C233-82
5. Design Loading AASHTO HS20-44; ASTM C478 specs for precast reinforced concrete manhole sections
6. Butyl resin joint seal conforms to latest ASTM C913 & C443 specs
7. Optional steel reinforced plastic steps meet ASTM C478 specs - available