


William N. Lamarre Concrete Products, Inc.

4' DIAMETER CATCH BASIN

4' inside diameter, 5" walls


H20

(Drawings Not to Scale)

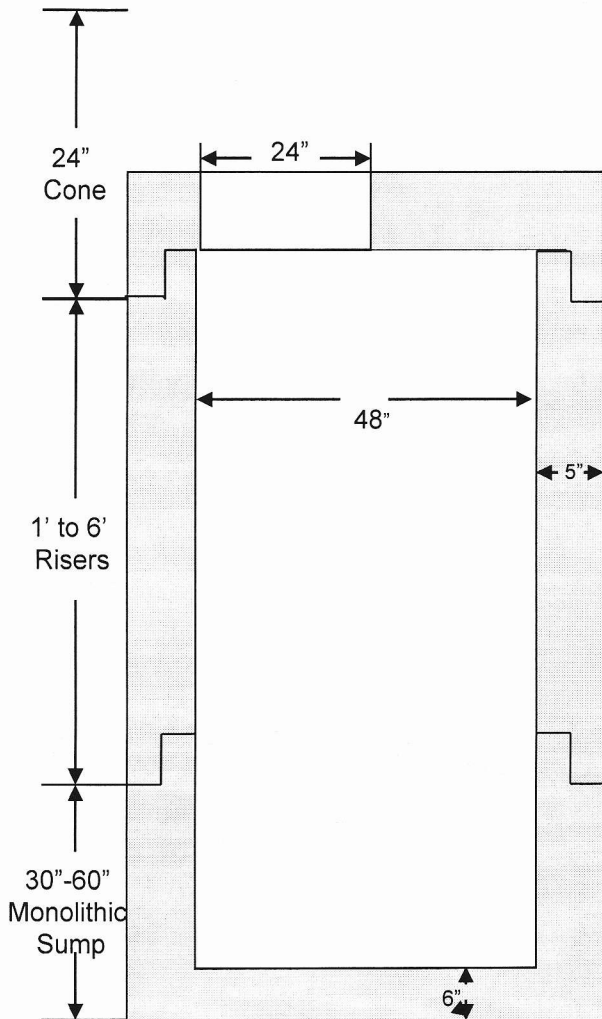


Section View - Typical Installation


Cone Replacement Options




24" Offset




24" Centered



30" Offset or Centered



Double Opening

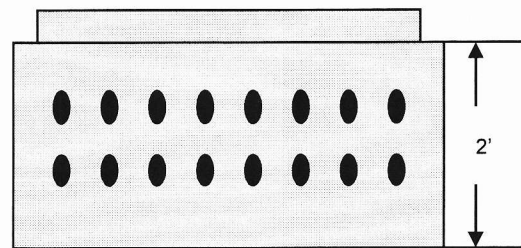

Leaching Manhole

Notes

1. Holes cored to your plans/specifications. Drawings or plans must be submitted prior to any coring.
2. Concrete strength f_c 4000PSI@28 days. Density 150 PCF.
3. Cement, Portland Type II or III, ASTM C150-81
4. Fiber, Admixtures, air & plasticizers per ASTM C233-82
5. Design Loading AASHTO HS20-44; ASTM C478 specs for precast reinforced concrete manhole sections
6. Butyl resin joint seal conforms to latest ASTM C913 & C443 specs
7. Optional steel reinforced plastic steps meet ASTM C478 specs – available