


**DO NOT USE SALT or DEICER ON PRECAST STEPS**  
**William N. Lamarre Concrete Products, Inc.**

**PRECAST STEPS**

**4', 5', 6' and 8' Widths-7" riser**  
**Standard and Side-Entry**  
 (Drawings Not to Scale)

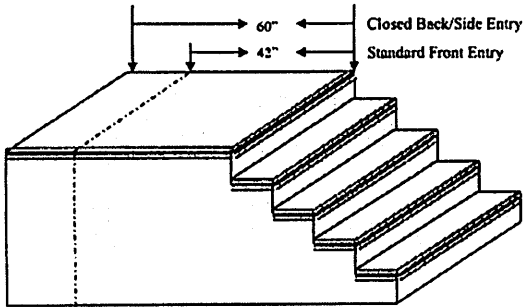

**DO NOT USE SALT or DEICER ON PRECAST STEPS!**  
 Side-Entry Steps only available in 4' wide.  
 Short or no platform steps also available via special order.  
 Railings for all sizes except special orders in stock.  
 Concrete strength f'c 4000PSI@28 days. Density 150 PCF.  
 Cement, Portland Type II or III, ASTM C150-81  
 Fiber, Admixtures, air & plasticizers per ASTM C233-82

**BE PRECISE....MEASURE TWICE!!**

Customer Signature \_\_\_\_\_

**Measuring Requirements:**

By NH & MA State Code... you **MUST** comply with the following:

- A. Door opening **MUST** be 36" wide.
- B. Each rise (Height of Step) **MUST** be uniform in size & a minimum 7".
- C. Each run (length of single step) **MUST** be a minimum 11" ours are 12".
- D. Handrail(s) must accompany ALL units 3 rises & up.

*NOTE: Railings installed at a later date will be subject to an installation charge.*

Billing Info: Name: _____ Contractor / Homeowner
Address: _____
Telephone: ( ) ____ - ____ Cell ( ) ____ - ____
Delivery Info: Name: _____
Address: _____
Directions _____
(use back if needed)

**STEP #1: PLEASE ANSWER THE FOLLOWING:**

1. Do you have an existing set of stairs? Yes  No
2. Is there an existing concrete pad? Yes  No
3. Are there any overhead or other site obstructions? Yes  No
4. Can the truck get within 18' or stair installation? Yes  No
5. What is the measurement from top of door threshold to finish grade? \_\_\_\_\_ "

**STEP #2: HOW TO MEASURE**

The Lamarre Concrete Way:

- A. Measure from door threshold to finish grade \_\_\_\_\_ "
- B. Subtract 7 from measurement above \_\_\_\_\_ "
- C. Divide the measurement in line B by 7 \_\_\_\_\_ "
- D. The # in line C is the 3 of risers required in stair unit

Refer to the chart below for measurement of stair units.

(There needs to be 7" from top of threshold to top of stair)

**NOTE: Return trip charge for step \$100**  
 (wrong size, site not ready, etc.)

Dimensions						
Helix:	7"	14"	21"	28"	35"	42"
Length:						
- Standard:	42"	54"	66"	78"	90"	102"
(Closed Back)						
- Side-Entry:	60"	72"	84"	96"	108"	120"
- Riser	1 Riser	2 Riser	3 Riser	4 Riser	5 Riser	6 Riser

7 1/2" riser also available in front entry steps only