
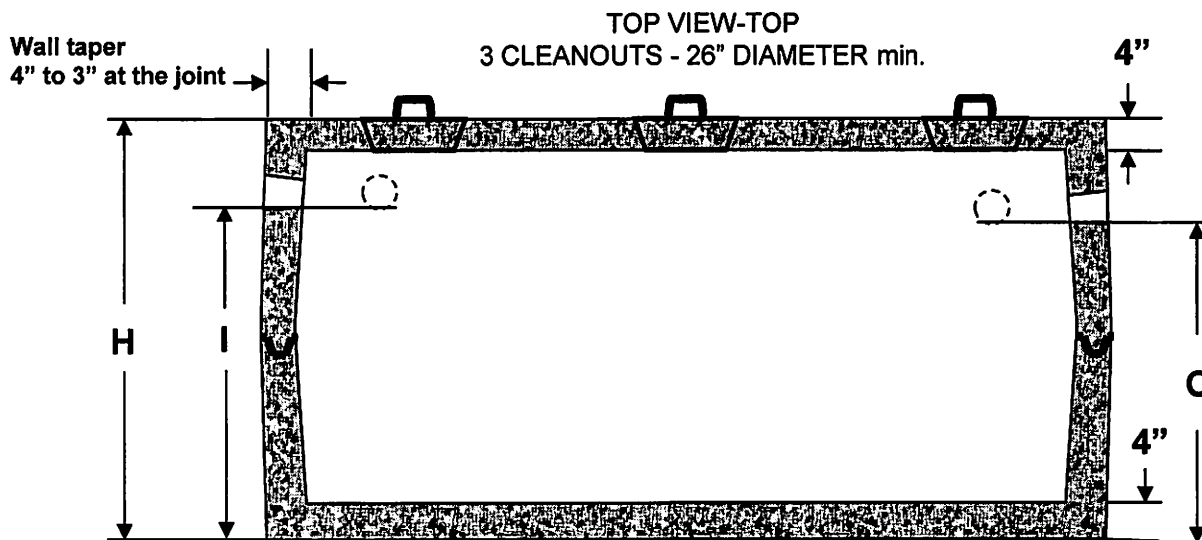


William N. Lamarre Concrete Products, Inc.

H10 PRECAST SEPTIC TANKS

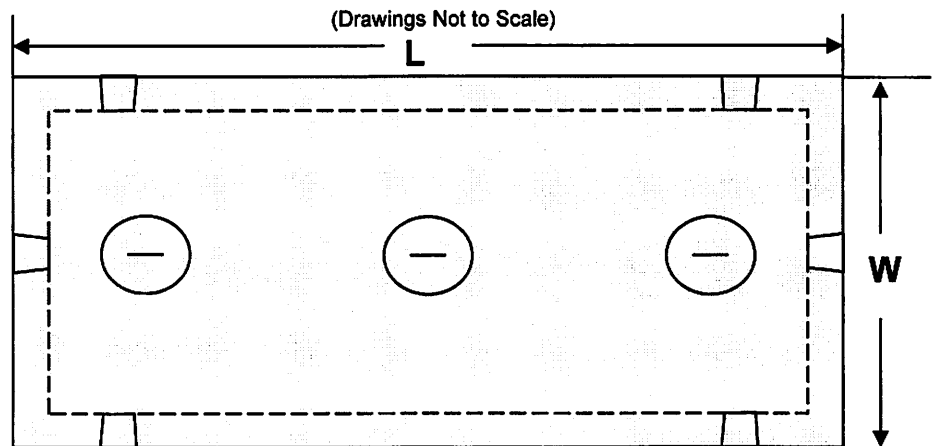

CROSS SECTION SIDE VIEW

Critical Tank Dimensions				
Liquid Capacity	I / O	H	L x W	Excavation Size
1000	56" / 53"	68"	8'6" x 4'10"	11' x 6'
1250	55" / 52"	68"	10' x 5'	12' x 7'
1500	56" / 53"	68"	10'6" x 5'6"	12' x 7'
2000	56" / 53"	67 1/2"	12' x 6'6"	13' x 8'
2500	71" / 68"	82 1/2"	12' x 6'6"	13 x 8'
3000	86" / 83"	97 1/2"	12' x 6'6"	13' x 8'

Notes

1. Concrete strength $f'c$ 4000PSI@28 days. Density 150 PCF.
2. Cement, Portland Type II or III, ASTM C150-81
3. Admixtures, air & plasticizers per ASTM C233-82
4. Reinforcement per ASTM C1227-latest revision
5. Constructions joints sealed with butyl rubber
6. Design conforms to 310 CMR 15.00, Mass Title V regs. for septic tanks

P.O. Box #333, 87 Adams Hill Rd, Greenville, NH 03048
 603-878-1340 MA 800-937-3435 NH 800-878-0514 Fax: 603 878-3349